


SBC-1244

LF Drivers-12 Inches

D4

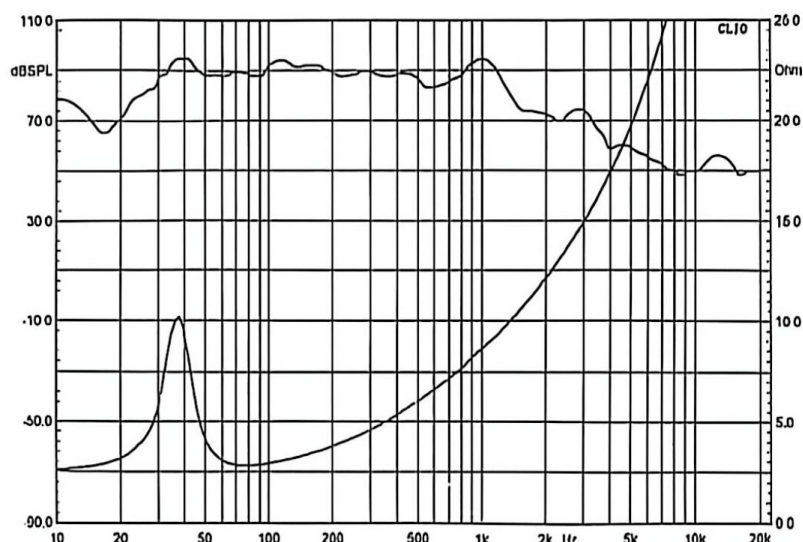

Parameter :

Nominal diameter:	12"	Mechanical Factor:	QES	1.0214
DC Resistance:	RE 4.0Ω	Compliance:	CMS	0.1163
BL Factor	BL 8.4707	Effective Cas Air Load	VAS	45.7772
Effective Moving Mass	MMS 156.1621	Resonance Frequency:	FS	37.3460
Total Factor:	QTS 0.8203	Effective Pistom Area	SD	0.0531
Electrical Factor:	QMS 4.1657	η (Eta Zero) :	η 0	0.2241

General Specification :

Nominal Diameter:	12 Inch	Winding Material:	Copper
Nominal Impedance:	4Ω+4Ω	Former Material:	Aluminum
RMS Power handling	1200W	Winding Depth:	40mm
Continuous Program Power:	2400W	Magnetic Gap Depth:	12mm
Sensitivity 1w/1m:	85dB	Surround Material:	Foam
Frequency Range:	38HZ-1.5KHZ	Cone Material:	Paper
Voice Coil Diameter	75mm/3 INCH	Magnet Material:	Double Ferrite Magnet

Mounting&Shipping Information:

Overall Diameter:	314mm	Shipping Weight:	10.5KG
Bolt circle Diameter:	296-8-Φ6.5	Shipping Box(Single):	380×380×250mm
Baffle Cutout Diameter	280mm		
Depth:	170mm		
Net Weight:	9.4KG		